

# MPG 200S21

## MICROPULSE GENERATOR



### FOR TESTS ACCORDING TO ...

› JASO D001-94

### MPG 200S21 - AUTOMOTIVE MICROPULSE GENERATOR


Micropulses occur on the battery supply system when an inductive load is disconnected from the DC supply. Their polarity depends on whether the inductive load is of a passive (e.g. a heater) or an active type (e.g. a DC motor). These pulses are of a medium energy content having a rise time in the low microsecond range and duration of several tenths or hundreds/thousands of microseconds.

The MPG 200S21 has a built-in battery switch to interrupt the DC supply voltage and is specifically designed for JASO D001-94, test pulses E1 and E2.

### HIGHLIGHTS

- › Standalone test generator
- › Covers JASO D 001-94
- › Test pulses E1, E2
- › Built-in electronic battery switch
- › Built-in CDN 60 V/50 A DC
- › Front panel operation
- › Standard Test routines

### APPLICATION AREAS




**TECHNICAL DETAILS**

**BENEFITS**

**MPG 200S21 - STANDALONE MICROPULSE GENERATOR WITH BUILT-IN BATTERY SWITCH**

The MPG 200S21 includes everything necessary to conduct fully compliant tests following JASO Specification D001-94 for pulses E1 and E2 for 24V system. An electronic battery switch is built-in in order to interrupt the DC supply voltage as required by the standards. It is a standalone tester including a 60 V/50 A DC coupling/decoupling network but still it can be integrated easily into a complete test system. Operation is both manual and by software via GPIB or USB. Fail inputs allow to control an ongoing test sequence based on the status of the DUT. A warning lamp control contact and a safety interlock is provided. Pre-programmed Standard Test routines allow highest user convenience. Still the MPG 200S21 offers the Quick Start test routine where parameters can be changed on-line during the test to evaluate the susceptibility level of an individual DUT.

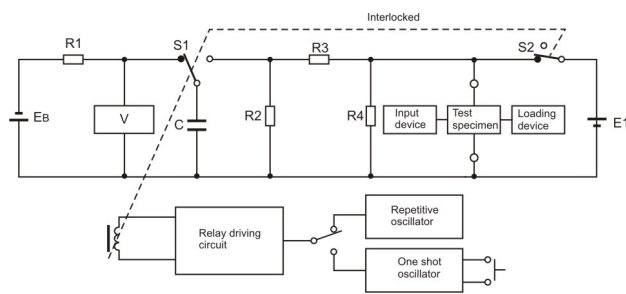

**SOFTWARE**

**ISO.CONTROL SOFTWARE FOR CONTROL AND DOCUMENTATION**

Outstanding user convenience, clearly structured windows and the EM TEST standards library along with the flexibility to generate user specific test sequences very easily are the main features of ISO.control software.


The software is automatically configured according to the connected EM TEST generators. ISO.control software covers international/national standards and most of the manufacturer standards and is continuously updated. Extensive reporting capabilities help the user to create test reports that meet international requirements.

The software iso.control is supported by Windows XP, Windows 7, Windows 8. Remote control is achieved either via USB or several supported GPIB boards from National Instruments.

**WAVESHAVE**

**WAVESHAVE PARAMETER**

- Vp : Maximum transient voltage
- t1 : Pulse repetition time
- t2 : Battery switch off time
- E1 : Battery supply voltage
- tau: Decaying time constant RC. Time required until the voltage decays to 36.8% of the maximum value.

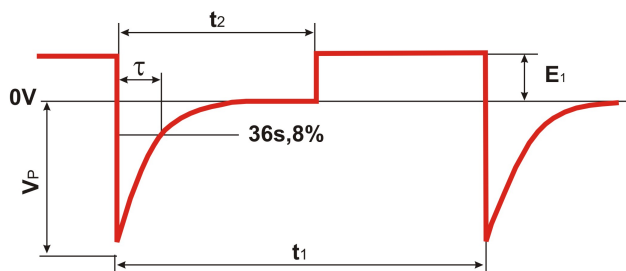

## TECHNICAL DETAILS

## TECHNICAL DETAILS

## PULSE SPECIFICATION

Open circuit voltage	$V_p = 20\text{ V} - 500\text{ V} \pm 10\%$
Polarity	Negative
Pulses of the MPG 200S21	Pulse E
Repetition Rate	$1.0\text{ s} - 99.0\text{ s}$ $1\text{ s} \leq 100\text{ V}$ $2\text{ s} \leq 200\text{ V}$ $3\text{ s} \leq 300\text{ V}$ $4\text{ s} \leq 400\text{ V}$ $5\text{ s} > 400\text{ V}$

## PULSE E1 AS PER JASO D 001

Capacitor voltage	$V_c = -457\text{ V}$
Capacitor	$C = 1000\text{ }\mu\text{F}$
Rise time	$< 1\text{ }\mu\text{s}$ (0% - 100%)
Pulse duration	$\tau$ (36.8%) = $26\text{ ms} \pm 20\%$
R2 resistance	$27\text{ }\Omega \pm 10\%$
R3 resistance	$300\text{ }\Omega \pm 10\%$
Polarity	Negative

## PULSE E2 AS PER JASO D 001

Capacitor voltage	$V_c = -320\text{ V}$
Capacitor	$C = 2000\text{ }\mu\text{F}$
Rise time	$< 1\text{ }\mu\text{s}$ (0% - 100%)
Pulse duration	$\tau$ (36.8%) = $26\text{ ms} \pm 20\%$
R2 resistance	$13\text{ }\Omega \pm 10\%$
R3 resistance	$210\text{ }\Omega \pm 10\%$
Polarity	Negative

## TRIGGER

Automatic	Automatic release of the pulses
Manual	Manual release of a single event
External	External release of a single event
Battery supply switch	Switch off time selectable $t_2 = 800\text{ ms} - 10.000\text{ ms}$

## OUTPUT

+/- output	Safety laboratory plugs
Coupling	To the battery + line
Decoupling	By battery switch
DUT supply	Max. 60 V / 50 A

## TEST ROUTINES

Quick Start	Immediate start, all parameters can be changed on-line
User test routines	<ol style="list-style-type: none"> <li>1. Customized test routines</li> <li>2. Change voltage after n by dV</li> </ol>
Service	Addresses, set-up and change standard routines

## INTERFACE

Serial interface	USB
Parallel interface	IEEE 488, addresses 1 - 30

## GENERAL DATA

Dimensions (LxWxH)	19"/3HU 394 mm x 484 mm x 154 mm
Weight	13.0 kg
Supply voltage	115/230 V +10/-15% (optional 100V) 50/60 Hz
Fuses	2x2 AT (115 V) or 2x1 AT (230 V)
Temperature	10 °C to 35 °C
Humidity	30 % to 70 %; non condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1.060 mbar)

## OPTIONS

## ACCESSORIES

iso.control	Software to control the test, including standard library, test report facility.
-------------	---------------------------------------------------------------------------------

# COMPETENCE WHEREVER YOU ARE



## CONTACT EM TEST DIRECTLY

### Switzerland

AMETEK CTS GmbH › Sternenhofstraße 15 › 4153 Reinach › Switzerland  
Phone +41 (0)61 204 41 11 › Fax +41 (0)61 204 41 00  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [sales.conducted.cts@ametek.com](mailto:sales.conducted.cts@ametek.com)

### Germany

AMETEK CTS Europe GmbH › Customer Care Center EMEA › Lünener Straße 211  
› 59174 Kamen › Germany  
Phone +49 (0) 2307 26070-0 › Fax +49 (0) 2307 17050  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [info.cts.de@ametek.com](mailto:info.cts.de@ametek.com)

### Poland

AMETEK CTS Europe GmbH › Biuro w Polsce › ul. Twarda 44 › 00-831 Warsaw › Poland  
Phone +48 (0) 518 643 12  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [Infopolska.cts@ametek.com](mailto:Infopolska.cts@ametek.com)

### USA / Canada

AMETEK CTS US › 52 Mayfield Ave › Edison › NJ 08837 › USA  
Phone +1 732 417 0501  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [usasales.cts@ametek.com](mailto:usasales.cts@ametek.com)

### P.R. China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd. › Beijing Branch › Western Section, 2nd floor › Jing Dong Fang Building (B10) › Chaoyang District › Beijing, China, 100015  
Phone +86 10 8526 2111 › Fax +86 (0)10 82 67 62 38  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [chinasales@ametek.com](mailto:chinasales@ametek.com)

### Republic of Korea

EM TEST Korea Limited › #405 › WooYeon Plaza › #986-8 › YoungDeok-dong › Giheung-gu › Yongin-si › Gyeonggi-do › Korea  
Phone +82 (31) 216 8616 › Fax +82 (31) 216 8616  
Internet: [www.emtest.co.kr](http://www.emtest.co.kr) › E-mail: [sales@emtest.co.kr](mailto:sales@emtest.co.kr)

### Singapore

AMETEK Singapore Pte. Ltd › No. 43 Changi South Avenue 2 › 04-01 Singapore 48164  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com) › E-mail: [singaporesales.cts@ametek.com](mailto:singaporesales.cts@ametek.com)

### Great Britain

AMETEK GB › 5 Ashville Way › Molly Millars Lane › Wokingham › Berkshire RG41 2 PL › Great Britain  
Phone +44 845 074 0660  
Internet: [www.ametek-cts.com](http://www.ametek-cts.com)

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.